


LEVEL 2 WI-FI BRIDGE

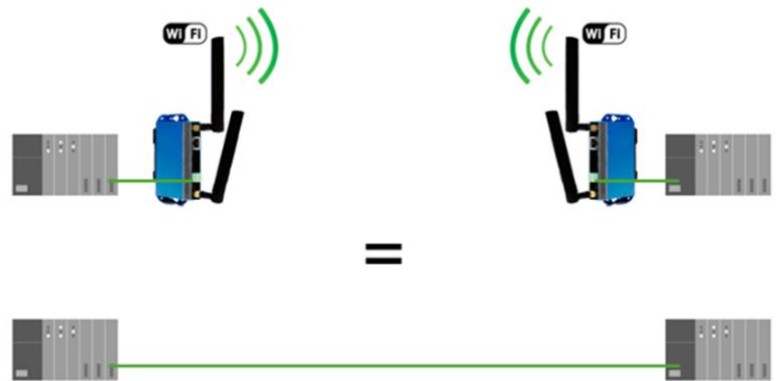

Power connector
(9 to 48 Vdc/10W)

LAN Ethernet 10/100 POE

LED Status



Antenna connectors

This plug & play solution is a **ready to use Ethernet Extender** based on Wi-Fi technology. It is an industrial grade device with a metallic enclosure.

CHARACTERISTICS

Pack description	
2 devises	One Wi-Fi client & one Access point.
Wi-Fi description	<ul style="list-style-type: none"> • Radio band : 2.4 GHz • Mode 802.11g+n • Channel 6 • Unique SSID (hidden) • WPA2-PSK
HMI	Use access for diagnostic
IP configuration	192.168.111.253 (252)/24
Distance – free field	400m in free field
Distance – inside a building	Up to 100m

Mechanical	
Material	Metallic enclosure
Dimension (H/L)	127 x 67 x 23 mm for one device
Connector	SMA
Weight	200g per Wi-Fi-device
Temperature	Operation: -20°C ~ + 60°C Storage: -40°C ~ + 85°C